



Java Programming and Dynamic Web Pages Class-BCA Vth Semester

Dr. Vijay Kant Sharma

Assistant professor ,

Department Of Computer Application

Jagatpur P.G. College, Varanasi

Mobile no.-8318110656

[Email-mzp.vijay@gmail.com](mailto:mzp.vijay@gmail.com)

OUTLINE:-

- **UNIT-IV**

HTML:

- Tags Use of commenting headers
- Text styling, text formatting
- Image, list
- Formatting text with font
- Tags, special characters, horizontal rule, line break, Table, Forms, Image maps

What is HTML?

- HTML, otherwise known as HyperText Markup Language, is the language used to create Web pages
- Using HTML, you can create a Web page with text, graphics, sound, and video

Tags

- The essence of HTML programming is tags
- A tag is a keyword enclosed by angle brackets (Example: `<I>`)
- There are opening and closing tags for many but not all tags; The affected text is between the two tags

More Tags...

- The opening and closing tags use the same command except the closing tag contains an additional forward slash /
- For example, the expression `Warning ` would cause the word 'Warning' to appear in bold face on a Web page

Nested Tags

- Whenever you have HTML tags within other HTML tags, you must close the nearest tag first
- Example:

```
<H1> <I> The Nation </I> </H1>
```

Structure of a Web Page

- All Web pages share a common structure
- All Web pages should contain a pair of `<HTML>`, `<HEAD>`, `<TITLE>`, and `<BODY>` tags

```
<HTML>
```

```
<HEAD>
```

```
<TITLE> Example </TITLE>
```

```
</HEAD>
```

```
<BODY>
```

This is where you would include the text and images on your Web page.

```
</BODY>
```

```
</HTML>
```

The <TITLE> Tag

- Choose the title of your Web page carefully; The title of a Web page determines its ranking in certain search engines
- The title will also appear on Favorite lists, History lists, and Bookmark lists to identify your page

Text Formatting

- Manipulating text in HTML can be tricky; Oftentimes, what you see is NOT what you get
- For instance, special HTML tags are needed to create paragraphs, move to the next line, and create headings

Text Formatting Tags

 Bold Face

<I> *Italics* </I>

<U> Underline </U>

<P> New Paragraph </P>

 Next Line

Changing the Font

- The expression ``
... `` can be used to change the font of
the enclosed text
- To change the size of text use the
expression `` ``
where n is a number between 1 and 7

Changing the Font

- To change the color, use `.... `; The color can also be defined using hexadecimal representation (Example: `#ffffff`)
- These attributes can be combined to change the font, size, and color of the text all at once; For example, ` `

Headings

- Web pages are typically organized into sections with headings; To create a heading use the expression `<Hn>...</Hn>` where n is a number between 1 and 7
- In this case, the 1 corresponds to the largest size heading while the 7 corresponds to the smallest size

Aligning Text

- The ALIGN attribute can be inserted in the <P> and <Hn> tags to right justify, center, or left justify the text
- For example, <H1 ALIGN=CENTER> The New York Times </H1> would create a centered heading of the largest size

Comment Statements

- Comment statements are notes in the HTML code that explain the important features of the code
- The comments do not appear on the Web page itself but are a useful reference to the author of the page and other programmers
- To create a comment statement use the `<!-- -->` tags

The Infamous Blink Tag

- It is possible to make text blink using the `<BLINK> ... </BLINK>` tag
- However, it is best to use this feature at most sparingly or not at all; What seems like a good idea to a Web designer can become very annoying to a Web user
- The `<BLINK>` tag is not supported by Internet Explorer

Page Formatting

- To define the background color, use the BGCOLOR attribute in the <BODY> tag
- To define the text color, use the TEXT attribute in the <BODY> tag
- To define the size of the text, type <BASEFONT SIZE=n>

Example

```
<HTML>
```

```
<HEAD>
```

```
<TITLE> Example </TITLE>
```

```
</HEAD>
```

```
<BODY BGCOLOR="black" TEXT="white">
```

```
<BASEFONT SIZE=7>
```

This is where you would include the text and images on your Web page.

```
</BODY>
```

```
</HTML>
```

Inserting Images

- Type ``, where `image.ext` indicates the location of the image file
- The `WIDTH=n` and `HEIGHT=n` attributes can be used to adjust the size of an image
- The attribute `BORDER=n` can be used to add a border `n` pixels thick around the image

Alternate Text

- Some browsers don't support images. In this case, the ALT attribute can be used to create text that appears instead of the image.
- Example:
``

Links

- A link lets you move from one page to another, play movies and sound, send email, download files, and more....
- A link has three parts: a **destination**, a **label**, and a **target**
- To create a link type
` label `

Anatomy of a Link

` label `

- In the above link, “page.html” is the destination. The destination specifies the address of the Web page or file the user will access when he/she clicks on the link.
- The label is the text that will appear underlined or highlighted on the page

Example: Links

- To create a link to CNN, I would type:
`CNN`
- To create a link to MIT, I would type:
`MIT`

Changing the Color of Links

- The LINK, VLINK, and ALINK attributes can be inserted in the <BODY> tag to define the color of a link
 - LINK defines the color of links that have not been visited
 - VLINK defines the color of links that have already been visited
 - ALINK defines the color of a link when a user clicks on it

Using Links to Send Email

- To create a link to an email address, type
``
Label
- For example, to create a link to send email to myself, I would type: `email Katie Dunn`

Anchors

- Anchors enable a user to jump to a specific place on a Web site
- Two steps are necessary to create an anchor. First you must create the anchor itself. Then you must create a link to the anchor from another point in the document.

Anchors

- To create the anchor itself, type `label` at the point in the Web page where you want the user to jump to
- To create the link, type `label` at the point in the text where you want the link to appear

Example: Anchor

`Chapter Two
`



Table of Contents

[Introduction](#)
[Chapter One](#)
[Chapter Two](#)

Introduction

(Text for Introduction)

Chapter 1

(Text for Chapter 1)

`Chapter 2 ` *Anchor* →

Chapter 2

(Text for Chapter 2)

Ordered Lists

- Ordered lists are a list of numbered items.
- To create an ordered list, type:

```
<OL>
```

```
  <LI> This is step one.
```

```
  <LI> This is step two.
```

```
  <LI> This is step three.
```

```
</OL>
```

Here's how it would look on the Web:

- 1. This is step one.**
- 2. This is step two.**
- 3. This is step three.**

More Ordered Lists....

- The TYPE=x attribute allows you to change the the kind of symbol that appears in the list.
 - A is for capital letters
 - a is for lowercase letters
 - I is for capital roman numerals
 - i is for lowercase roman numerals

Unordered Lists

- An unordered list is a list of bulleted items
- To create an unordered list, type:

```
<UL>
```

```
<LI> First item in list
```

```
<LI> Second item in list
```

```
<LI> Third item in list
```

```
</UL>
```

Here's how it would look on the Web:

- **First item in list**
- **Second item in list**
- **Third item in list**

More Unordered Lists...

- The TYPE=shape attribute allows you to change the type of bullet that appears
 - *circle* corresponds to an empty round bullet
 - *square* corresponds to a square bullet
 - *disc* corresponds to a solid round bullet; this is the default value

Forms

- What are forms?
 - An HTML form is an area of the document that allows users to enter information into fields.
 - A form may be used to collect personal information, opinions in polls, user preferences and other kinds of information.

Forms

- There are two basic components of a Web form: the shell, the part that the user fills out, and the script which processes the information
- HTML tags are used to create the form shell. Using HTML you can create text boxes, radio buttons, checkboxes, drop-down menus, and more...

Example: Form

First Name:

← Text Box

Last Name:

Type of Shirt:

← Drop-down Menu

Size: Large Medium Small

← Radio Buttons

Color: Red Navy Black

← Checkboxes

Comments?

← Text Area

↑ Reset Button

↑ Submit Button

The Form Shell

- A form shell has three important parts:
 - the <FORM> tag, which includes the address of the script which will process the form
 - the form elements, like text boxes and radio buttons
 - the submit button which triggers the script to send the entered information to the server

Creating the Shell

- To create a form shell, type `<FORM METHOD=POST ACTION="script_url">` where “script_url” is the address of the script
- Create the form elements
- End with a closing `</FORM>` tag

Creating Text Boxes

- To create a text box, type `<INPUT
TYPE="text" NAME="name"
VALUE="value" SIZE=n
MAXLENGTH=n>`
- The NAME, VALUE, SIZE, and MAXLENGTH attributes are optional

Text Box Attributes

- The `NAME` attribute is used to identify the text box to the processing script
- The `VALUE` attribute is used to specify the text that will initially appear in the text box
- The `SIZE` attribute is used to define the size of the box in characters
- The `MAXLENGTH` attribute is used to define the maximum number of characters that can be typed in the box

Example: Text Box

```
First Name: <INPUT  
TYPE="text"  
NAME="FirstName"  
VALUE="First Name"  
SIZE=20>  
<BR><BR>
```

```
Last Name: <INPUT  
TYPE="text"  
NAME="LastName"  
VALUE="Last Name"  
SIZE=20>  
<BR><BR>
```

- Here's how it would look on the Web:

First Name:

Last Name:

Creating Larger Text Areas

- To create larger text areas, type
`<TEXTAREA NAME="name" ROWS=n1
COLS=n2 WRAP> Default Text
</TEXTAREA>`, where n1 is the height of
the text box in rows and n2 is the width of
the text box in characters
- The WRAP attribute causes the cursor to
move automatically to the next line as the
user types

Example: Text Area

Comments?

<TEXTAREA NAME="Comments" ROWS=10
COLS=50 WRAP>

</TEXTAREA>

Creating Radio Buttons

- To create a radio button, type `<INPUT TYPE="radio" NAME="name" VALUE="data">Label`, where “data” is the text that will be sent to the server if the button is checked and “Label” is the text that identifies the button to the user

Example: Radio Buttons

** Size: **

```
<INPUT TYPE="radio" NAME="Size"  
  VALUE="Large">Large
```

```
<INPUT TYPE="radio" NAME="Size"  
  VALUE="Medium">Medium
```

```
<INPUT TYPE="radio" NAME="Size"  
  VALUE="Small">Small
```

Creating Checkboxes

- To create a checkbox, type `<INPUT TYPE="checkbox" NAME="name" VALUE="value">Label`
- If you give a group of radio buttons or checkboxes the same name, the user will only be able to select one button or box at a time

Example: Checkboxes

 Color:

```
<INPUT TYPE="checkbox" NAME="Color"
VALUE="Red">Red
```

```
<INPUT TYPE="checkbox" NAME="Color"
VALUE="Navy">Navy
```

```
<INPUT TYPE="checkbox" NAME="Color"
VALUE="Black">Black
```

Creating Drop-down Menus

- To create a drop-down menu, type
`<SELECT NAME="name" SIZE=n
MULTIPLE>`
- Then type `<OPTION VALUE=
"value">Label`
- In this case the `SIZE` attribute specifies the height of the menu in lines and `MULTIPLE` allows users to select more than one menu option

Example: Drop-down Menu

WHICH IS FAVOURITE FRUIT:

<SELECT>

<OPTION VALUE="MANGOES">MANGOES

<OPTION VALUE="PAPAYA">PAPAYA

<OPTION VALUE="GUAVA">GUAVA

<OPTION VALUE="BANANA"> BANANA

<OPTION VALUE="PINEAPPLE">PINEAPPLE

</SELECT>

Creating a Submit Button

- To create a submit button, type `<INPUT TYPE="submit">`
- If you would like the button to say something other than submit, use the `VALUE` attribute
- For example, `<INPUT TYPE="submit" VALUE="Buy Now!">` would create a button that says “Buy Now!”

Creating a Reset Button

- To create a reset button, type `<INPUT TYPE="reset">`
- The `VALUE` attribute can be used in the same way to change the text that appears on the button

Tables

- Tables can be used to display rows and columns of data, create multi-column text, captions for images, and sidebars
- The `<TABLE>` tag is used to create a table; the `<TR>` tag defines the beginning of a row while the `<TD>` tag defines the beginning of a cell


Adding a Border

- The `BORDER=n` attribute allows you to add a border `n` pixels thick around the table
- To make a solid border color, use the `BORDERCOLOR="color"` attribute
- To make a shaded colored border, use `BORDERCOLORDARK="color"` and `BORDERCOLORLIGHT="color"`

Creating Simple Table

```
<TABLE BORDER=10>  
  <TR>  
    <TD>One</TD>  
    <TD>Two</TD>  
  </TR>  
  <TR>  
    <TD>Three</TD>  
    <TD>Four</TD>  
  </TR>  
</TABLE>
```

- Here's how it would look on the Web:

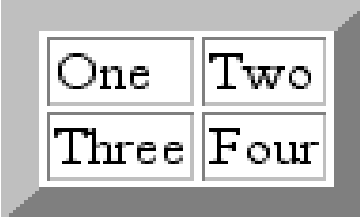

One	Two
Three	Four

Adjusting the Width

- When a Web browser displays a table, it often adds extra space. To eliminate this space use the `WIDTH =n` attribute in the `<TABLE>` and `<TD>` tags
- Keep in mind - a cell cannot be smaller than its contents, and if you make a table wider than the browser window, users will not be able to see parts of it.

Centering a Table

- There are two ways to center a table
 - Type `<TABLE ALIGN=CENTER>`
 - Enclose the `<TABLE>` tags in opening and closing `<CENTER>` tags

Wrapping Text around a Table

- It is possible to wrap text around a table. This technique is often used to keep images and captions together within an article.
- To wrap text around a table, type `<TABLE ALIGN = LEFT>` to align the table to the left while the text flows to the right.
- Create the table using the `<TR>`, `<TD>`, and `</TABLE>` tags as you normally would

Adding Space around a Table

- To add space around a table, use the HSPACE=n and VSPACE=n attributes in the <TABLE> tag
- Example:

```
<TABLE HSPACE=20 VSPACE=20>
```

Spanning Cells Across Columns

- It is often necessary to span one cell across many columns. For example, you would use this technique to span a headline across the columns of a newspaper article.
- To span a cell across many columns, type `<TD COLSPAN=n>`, where n is the number of columns to be spanned

Spanning Cells Across Rows

- To span a cell across many rows, type `<TD ROWSPAN=n>`, where n is the number of rows

Aligning Cell Content

- By default, a cell's content are aligned horizontally to the left and vertically in the middle.
- Use `VALIGN=direction` to change the vertical alignment, where “direction” is top, middle, bottom, or baseline
- Use `ALIGN=direction` to change the horizontal alignment where “direction” is left, center, or right

Controlling Cell Spacing

- Cell spacing is the space *between* cells while cell padding is the space *around* the contents of a cell
- To control both types of spacing, use the `CELLSPACING =n` and `CELLPADDING=n` attributes in the `<TABLE>` tag

Nesting Tables

- Create the inner table
- Create the outer table and determine which cell of the outer table will hold the inner table
- Test both tables separately to make sure they work
- Copy the inner table into the cell of the outer table
- Don't nest too many tables. If you find yourself doing that, find an easier way to lay out your Web page

Changing a Cell's Color

- To change a cell's color, add the `BGCOLOR="color"` attribute to the `<TD>` tag
- Example:
`<TD BGCOLOR="blue">`

Dividing Your Table into Column Groups

- You can divide your table into two kinds of column groups: structural and non-structural.
- Structural column groups control where dividing lines are drawn; Non-structural groups do not
- Both let you format an entire column of cells at once

Column Groups

- To create structural column groups, type `<COLGROUP SPAN=n>` after the `<TABLE>` tag, where `n` is the number of columns in the group
- To create non-structural column groups, type `<COL SPAN=n>`, where `n` is the number of columns in the group

Dividing Table into Horizontal Sections

- You can also create a horizontal section consisting of one or more rows. This allows you to format the rows all at once
- To create a horizontal section, type `<THEAD>`, `<TBODY>`, or `<TFOOT>` before the first `<TR>` tag of the section
- Netscape does not support these tags

Controlling Line Breaks

- Unless you specify otherwise a browser will divide the lines in a cell as it sees fit.
- The NOWRAP attribute placed within the `<TD>` tag forces the browser to keep all the text in a cell on one line
- Example:
 - `<TD NOWRAP>`Washington, D.C.

Exercise-

1-Write a program in html to print a table in which 3 rows and 4 columns?

2-Write a program to print your name in bold letters with headers?

3-Write a program in html to display the frames with frame tags?

4-Write a program in html to link your image with given page and link it with next page?

References

- Castro, Elizabeth and Hyslop . *HTML5, and CSS, Eight Edition: (Visual QuickStart Guide)* , Peachpit Press, 2013.
- Devlin, Ian. *HTML5 Multimedia: Develop and Design* , Peachpit Press, 2011.
- Felke-Morris. *Basics of Web Design: HTML5 & CSS3, 5th Edition* , Pearson Education, 2019.
- Felke-Morris, *Web Development & Design Foundations with HTML5, 10th Edition* , Addison-Wesley, 2020.
- Keith, Jeremy and Andrew, Rachel. *HTML5 For Web Designers* , A Book Apart, 2016.
- Lawson, Bruce and Sharp, Remy. *Introducing HTML5* , New Riders Press, 2010.
- Meiert, Jens Oliver. *The Little Book of HTML/CSS Coding Guidelines* , O'Reilly, 2015.
- Meiert, Jens Oliver. *Upgrade Your HTML (the Booklet)* , Amazon Digital Services LLC, 2019.
- Pfeiffer, Silvia, and Green, Tom. *Beginning HTML5 Media: Make the most of the new video and audio standards for the Web* , APress, 2015.
- Pfeiffer, Silvia. *The Definitive Guide to HTML5 Video* , APress, 2010.
- Pilgrim, Mark. *HTML5: Up and Running* , O'Reilly, 2010.

Declaration

The content is exclusively meant for academic purpose and for enhancement teaching and learning. Any other use of economic/commercial purpose is strictly prohibited. The users of the content shall not distribute ,disseminate or share it with anyone else and its use is restricted to advancement of individual knowledge. The information provided in this e-content is authentic and best as per my knowledge.

Dr.Vijay kant Sharma

Assistant professor

Department of computer Application

Jagatpur P.G. College Vranasi

Thanks